

Bellmont

cabinet co.

1900 series

1600 series

PRODUCT CARE PACKET



BELLMONT 1900 SERIES

LIMITED LIFETIME WARRANTY

At Bellmont Cabinet Company, we are proud of the quality, design and construction of our Bellmont 1900 series. We make every effort to ensure that the products we produce conform to our rigid specifications. To show our commitment to our products and customers, Bellmont Cabinet Company hereby warrants its products to the original purchaser, a limited lifetime warranty against manufacturing defects in materials and workmanship under normal use and conditions. This warranty begins upon the date of delivery and runs for as long as you own your home.

Our cabinetry is specifically manufactured for use in interior residential applications excluding garages and/or other exterior applications. Usage in any other application is not covered by this warranty. This warranty is not transferable. Claims under warranty are limited to replacement product only. Bellmont Cabinet Company reserves the right to substitute similar product for warranty issues on discontinued products. Transportation, shipping charges and installation labor are the responsibility of the purchaser. Warranty is void on any products altered or repaired in the field by unauthorized labor. Authorized warranty work performed or replacement parts provided does not extend the warranty period any further. Warranty is void on product stored in non-temperature controlled environments before installation.

WOOD PRODUCTS AND FINISHES

The typical aging process of solid wood and veneer products may cause the color to vary or change from the original tone or color. Exposure to ultraviolet radiation, air, high humidity or moisture accelerates this process and is not covered by warranty. Exposure to extreme heat or sunlight, or evidence of misuse or abuse also voids this warranty. Wood products ordered as 'unfinished' or primed will not be covered by this warranty. Certain door styles will not be covered by this warranty when installed in specific geographic areas, as noted in our catalog. When ordering additions or replacements for an existing installation, we require a large sample (such as a door) from the existing installation for color match and must be received before the order can be placed. Colors will be matched as closely as possible.

RIGID THERMOFOIL AND LAMINATE DOORS

Because glues and other adhesives used in the manufacturing process can be subject to failure when in contact with excessive heat, precautions must be taken to eliminate this possibility. Specifically, doors and drawer fronts on either side of a range or oven must be opened when the oven is being used in high heat cycles, including broil and self-cleaning operation. Failure to follow this procedure will void the warranty.

Except as provided herein, Bellmont Cabinet Company makes no express warranties and any implied warranties, including those of fitness for a particular purpose and merchantability or habitability; and those otherwise available under Washington state or federal laws are specifically excluded under this warranty. Bellmont Cabinet Company shall have no liability or responsibility to the customer or any other person or entity with respect to any liability, loss or damage caused directly or indirectly by use or performance of the product or arising out of any breach of this warranty, including, but not limited to, any damages resulting from inconvenience, loss of time, property, income, or any indirect, special, incidental or consequential damages even if Bellmont Cabinet Company has been advised of the possibility of such damages.

Some states do not allow the limitations on how long an implied warranty lasts or the exclusion of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

To request service under this limited warranty, contact Bellmont Cabinet Company's Customer Service department in writing. A dated sales receipt as proof of purchase is required to obtain benefits from this warranty. Please send your claims via e-mail to CustSvc@bellmontcabinets.com or by mail to Bellmont Cabinet Company, Attn: Customer Service, P.O. Box 2050, Sumner, WA 98390.

BELLMONT 1600 SERIES

LIMITED LIFETIME WARRANTY

At Bellmont Cabinet Company, we are proud of the quality, design and construction of our 1600 series cabinetry. We make every effort to ensure that the products we produce conform to our rigid specifications. To show our commitment to our products and customers, we provide a lifetime limited warranty against defects in material and workmanship beginning on the date of shipping from our factory.

Our cabinetry is specifically manufactured for use in interior residential applications excluding garages and/or other exterior applications. Usage in any other application is not covered by this warranty. This warranty is not transferable. Claims under warranty are limited to replacement product only. Transportation, shipping charges and installation labor are the responsibility of the purchaser. Warranty is void on any products altered or repaired in the field by unauthorized labor. Warranty could be void for product stored in non climate controlled conditions prior to and during installation. Authorized warranty work performed or replacement parts provided does not extend the warranty period any further. Warranty is void on product stored in non-temperature controlled environments before installation.

WOOD PRODUCTS AND FINISHES

The typical aging process of solid wood and wood veneer products may cause the color to vary or change from the original tone or color. This is normal with all fine hardwoods and veneers. Exposure to ultraviolet radiation, air, high humidity or moisture accelerates this process and is not covered by warranty. Exposure to extreme heat or sunlight, or evidence of misuse or abuse also voids this warranty. Wood products ordered as 'unfinished' will not be covered by this warranty. When ordering additions or replacements for an existing installation, we require a large sample (such as a door) from the existing installation for color match and this must be received before the order can be placed. Colors will be matched as closely as possible.

RIDGID THERMOFOIL AND LAMINATE DOOR STYLES

Because glues and other adhesives used in the manufacturing process can be subject to failure when in contact with excessive heat, precautions must be taken to eliminate this possibility. Specifically, doors and drawer fronts on either side of a range or oven **MUST** be opened when the oven is being used in high heat cycles, including broil and self-cleaning operation. Failure to follow this procedure will void the warranty.

Except as provided herein, Bellmont Cabinet Company makes no express warranties and any implied warranties, including those of fitness for a particular purpose and merchantability or habitability and those otherwise available under Washington state or federal laws are specifically excluded under this warranty. Bellmont Cabinet Company shall have no liability or responsibility to the customer or any other person or entity with respect to any liability, loss or damage caused directly or indirectly by use or performance of the product or arising out of any breach of this warranty. This includes, but is not limited to, any damages resulting from inconvenience, loss of time, property, income, or any indirect, special, incidental or consequential damages; even if Bellmont Cabinet Company has been advised of the possibility of such damages. Some states do not allow the limitations on how long an implied warranty lasts or the exclusion of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

PRODUCT CARE

WOOD DOORS



The beauty of real wood cabinets increases with time. Fine woods will take on their own unique patina and color tones will slightly change with natural aging processes. Our Sherwin Williams conversion varnish topcoat provides a durable and long lasting satin-luster finish that protects the wood from typical household dirt and grime. **To best maintain this finish**, occasionally clean using a soft cloth dampened with a mild soap solution, then wipe with a clean towel dampened with water only, then dry with a soft cloth. **Do not use petroleum type cleaners or those containing ammonia, alcohol, or abrasives.** Surface scratches and nicks can easily be repaired by using the Belmont touch up kit that shipped with your cabinetry. If required, colored caulking to match the wood stain is available through Color Rite, www.colorriteinc.com / 1-855-82CAULK. Order by specifying Belmont, wood species, then stain color.

LAMINATE & THERMOFOIL DOORS

Laminated and Thermofoil cabinet faces provide a durable easy to maintain surface. Regular cleaning should be performed using a soft cloth dampened with mild soapy water. Apply with a soft cloth and dry with a clean soft cloth. Do not use paper towels, especially on gloss finish laminates, as the wood pulp in the paper can leave abrasive marks on the surface. Also, never 'dry wipe' laminate surfaces.



DOOR ADJUSTMENTS

The final touch of a successful and beautiful installation is the proper adjusting of the doors and drawer fronts. These fine-tuning adjustments are the responsibility of the installer. Please see the pictures below that show the easy adjustments for the door hinges. Be sure to adjust the drawer fronts and doors **BEFORE** drilling for handles or knobs. For the Heritage drawer system, the screws for the handles or knobs should go through both the drawer box and the drawer front.


All adjustments are performed with a Phillips head screwdriver. The door can be removed using the quick release mechanism located at the back of the hinge. This does not interfere with hinge adjustments.

DOOR HINGE ADJUSTMENTS 1900 SERIES

(A) Turn this screw for Horizontal adjustment of doors. Use this to align the 'reveals' or gaps between adjacent doors and drawers. Proper door alignment usually requires adjusting upper and lower hinges (also middle hinge on a tall cabinet door).

(B) Turn this screw for Vertical door adjustment. Supporting the weight of the door with one hand will facilitate this adjustment. All hinges on the door must be adjusted for best results.

(C) Turn this screw to move the door in or out. Use this to adjust the door so that it evenly contacts the cabinet box at top and bottom.

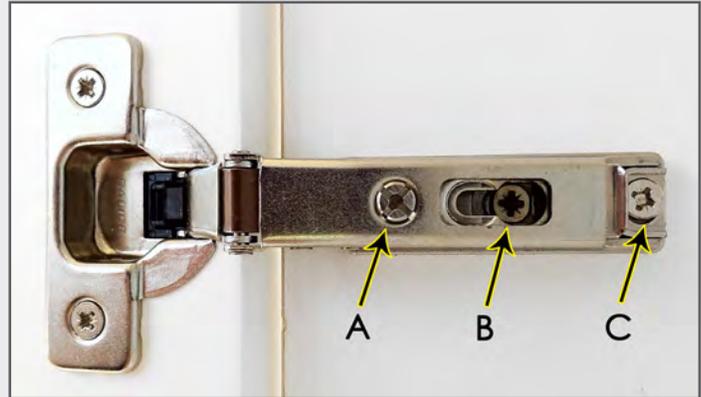


DOOR HINGE ADJUSTMENTS 1600 SERIES

(A) Turn this screw for Horizontal adjustment of doors. Use this to align the 'reveals' or gaps between adjacent doors and drawers. Proper door alignment usually requires adjusting upper and lower hinges (also middle hinge on a tall cabinet door).

(B) Vertical door adjustment is made by loosening these screws on all hinges. Gently 'bump' the door up or down, and then retighten the same screws.

(C) Turn this screw to move the door in or out. Use this to adjust the door so that it evenly contacts the cabinet box at top and bottom.

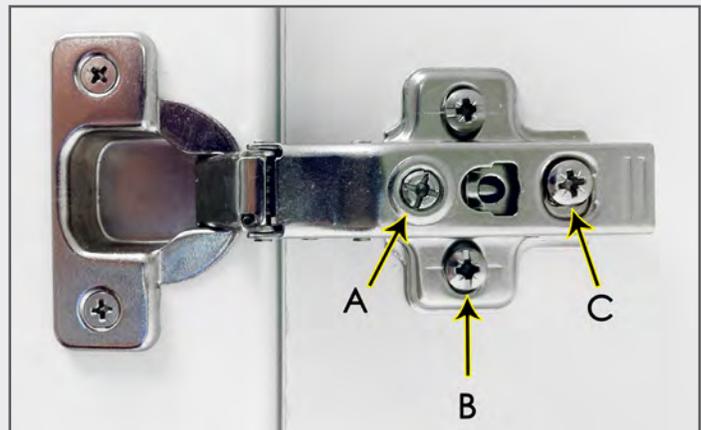

DRAWER ADJUSTMENTS

1900 STANDARD WOOD DRAWER & HERITAGE DRAWER

- TO REMOVE

1. Pull drawer completely open on bottom of drawer box.
2. Squeeze both release levers.
3. Lift drawer box up to remove.

- TO REPLACE

1. Pull drawer glides all the way out.
2. Lay drawer box on glides.
3. Gently slide drawer box inward until guides 'snap' in.

Note: It may require pulling the actual glide forward to complete the snap in connection.



- TO ADJUST ALIGNMENT on the **Standard** wood drawers (A), slide white adjustment tab forward or backward to raise or lower the drawer box. On **Heritage** drawers (B), slide gray adjustment tab to make this adjustment. This movement will adjust the horizontal reveal on the drawer faces. For additional adjustment, loosen the screws that attach the drawer face to the drawer box and adjust.

A



B



1900 LEGRA DRAWER

- TO REMOVE

1. Reach under the drawer box and squeeze the two levers simultaneously to release the drawer box from the drawer.


- TO REPLACE

1. Pull drawer glides all the way out.
2. Lay drawer box on glides.
3. Gently slide drawer box inward until guides 'snap' in.

- TO ADJUST

1. Turn Screw (A) on the inside back corner, and the same screw on the other side, to make slight adjustments to the tilt angle to the drawer face.
2. Turn Screw (B) clockwise (one on each side), to release the drawer face from the drawer box.
3. Turn Screw (C) on each side to raise/lower the drawer face to fine tune alignment.
4. Twist Screw (D) on each drawer side to make lateral (left/right) adjustments to the drawer face.

Note: Adjustment screws require an allen wrench or Torx #20 screwdriver. Phillips head does NOT work.

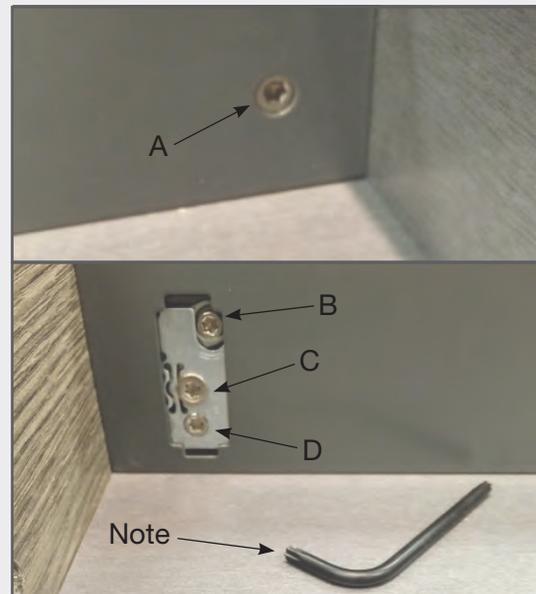

DRAWER ADJUSTMENTS

1600 STANDARD ACCESS WOOD DRAWER

- TO REMOVE
 1. Pull both release levers (A) forward to disengage drawer from guides.
- TO ADJUST
 1. Move Adjustment Tab (B) to raise or lower drawer box slightly on each end to fine tune alignment.




1900 & 1600 SATINO DRAWER

- REMOVE plastic cover to expose adjustment area. (A)




- TO ADJUST
 1. Turn Screw (B) (right hand drawer side only), to make lateral adjustments to the drawer face.
 2. Turn Screw (C) to raise/lower the drawer face to fine tune alignment.
 3. Twist Screw (D) on each drawer side to release the drawer face from the drawer box.
 4. Pull the drawer box forward while lifting these tabs (E) (1 on each side), to disengage the drawer box from the guides.

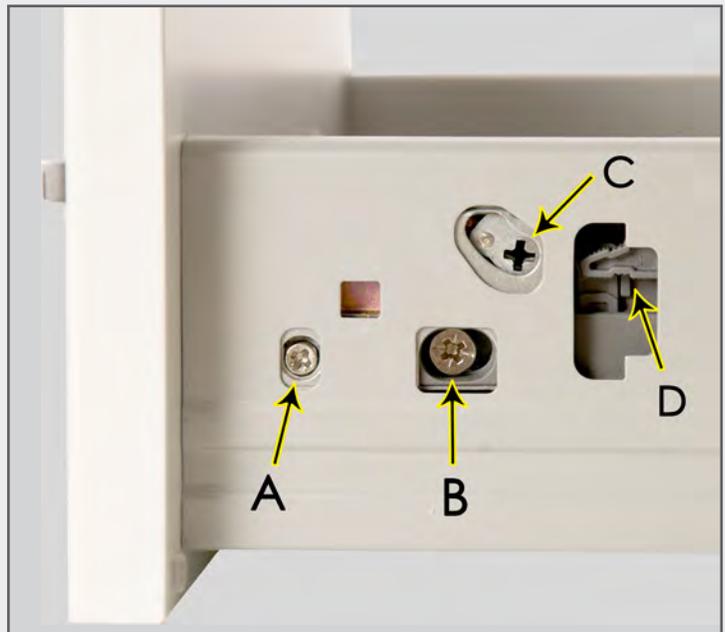


DRAWER ADJUSTMENTS

1900 INTIVO DRAWER (DISCONTINUED)

- REMOVE metal cover to expose adjustment area. (A)

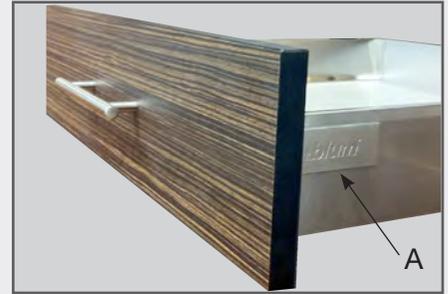

- TO ADJUST
 1. Turn Screw (B) to make lateral adjustments to the drawer face.
 2. Turn Screw (D) to raise/lower the drawer face to fine tune alignment.
 3. Twist Screw (C) on each drawer side to release the drawer face from the drawer box.

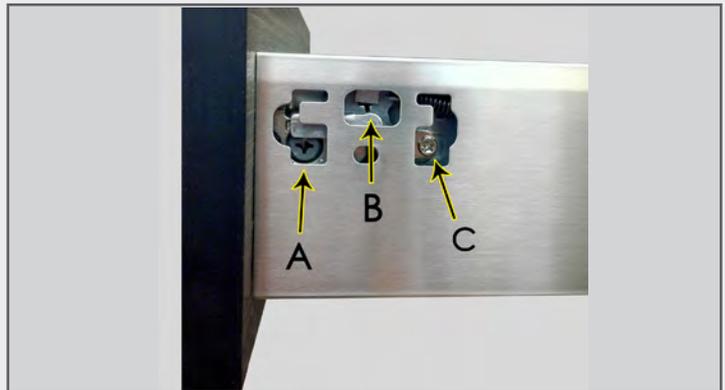

TOUCH UP CARE

CUSTOMER TOUCH UP KIT

This touch up kit is to be used to fill any pin holes or surface marks/scratches. Depending upon the stain and wood, the tow putty sticks need to be blended to the final color. Warming the putty sticks with low heat will facilitate that process.



COLOR RITE CAULKING

This is a latex based color-matched caulking available in over 450 colors. A 5.5 oz tube will cover approximately 55 lineal feet with a 1/8" bead. Use it to fill mitered joint gaps, nail or screw holes, dents, etc....

Color rite has all of our stain and paint color samples on hand, and can provide a very close match right from their expansive inventory. They can even create custom matches if needed.



To Order:

(This product is not available through Belmont, you must order directly from Color Rite.)

1. Contact Color Rite, (orders@colorriteinc.com or 1-855-82CAULK).
2. Specify by our brand name of Belmont Cabinets
3. Specify wood species or paint finish
4. Provide color name

Within a day or so, they will ship a 5.5 oz. tube of colored caulking.

Pay **Color Rite** directly with Visa, MasterCard, American Express or Discover.